

76 cm freestanding bottom mount refrigerator, stainless steel Master Series



RBM76F4FXNC

This 70 cm freestanding bottom-mount refrigerator has a total capacity of 481 liters. The refrigerator is equipped with 4 shelves, 3 of which with variable height, 3 height-adjustable bins + 1 stationary and 2 drawers with adjustable humidity. The ZeroFresco chiller drawer allows you to better preserve your meat and fish at a temperature of around 0°C.

The Total No Frost cooling system avoids the formation of ice and bacteria. The LED touch interface has been designed for maximum ease of use. The LED illumination ensures perfect lighting on all levels.

PureBreeze UV technology eliminates 99.99% of bacteria and viruses with UV-C LED rays, while the activated carbon filter effectively filters odors and improves air quality, keeping the atmosphere of the refrigerator cool.

Using one of the 2 available handle kits in Professional and Master Series style, this refrigerator integrates seamlessly with all other Bertazzoni appliances into style-harmonized suites for a true, high-performing kitchen.

E energy class.

[Guarda online](#)

Specifications

Features

General features


Size	76 cm
Cooling system	Total No Frost
User interface	internal digital LED touch interface
Display functions	Super freeze, Eco mode
Lighting	LED lighting
Open door alarm	yes
Door finishing	stainless steel
Cabinet finishing	white
Refrigerator net capacity	402 L
Refrigerator shelves	3 height-adjustable + 1 stationary
Refrigerator drawers	1 with adjustable humidity + 1 FrescoZero with separate temperature and humidity control
Bins	3 height-adjustable bins + 1 gallon-sized bin
Freezer net capacity	131 L
Freezer drawers	2 full extension drawers
Sound rating	41 dbA

Technical specifications


Energy class	E
Voltage and frequency	220-240V, 50 Hz
Absorbed power (W)	211 W
Annual energy consumption (kWh)	284

Dimensions

PRODUCT DIMENSIONS

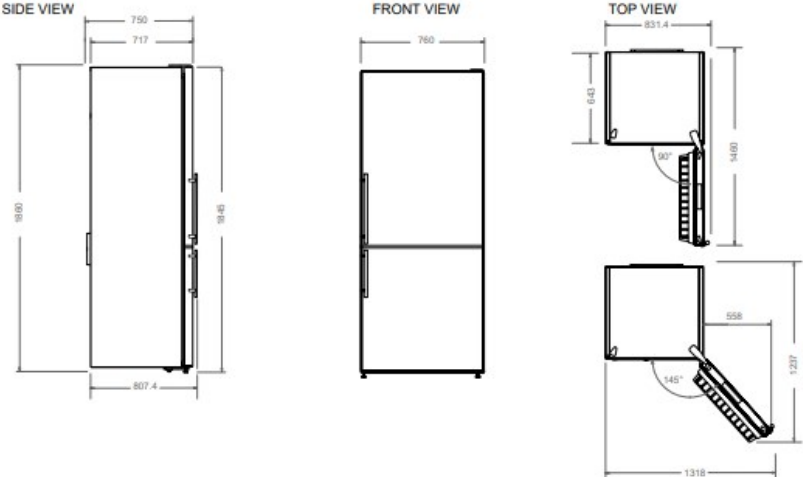

CUTOUT DIMENSIONS

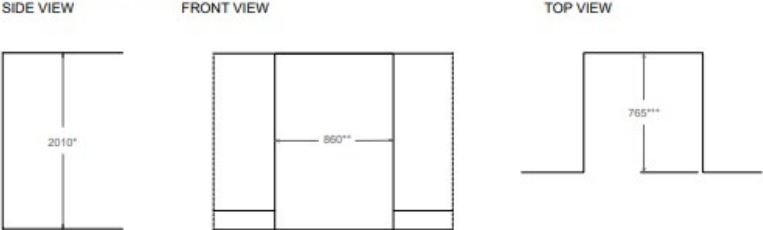

* dimension with a minimum clearance of 150 mm on top

** dimension with a minimum clearance of 50 mm on both sides

*** dimension with a minimum clearance of 15 mm on back